

Seamless Professional Scaler and Switcher



MODEL **VA1**

- Seamless switching between any source
- Free customized among 2.5 million
- PIP from any source in any position & size
- EDID Management
- Cascade Split
- Open Protocol Control
- Two Sender Card Built-in
- Signal Hot Backup

SPROLINK

www.sprolink.com




FEATURES

Support PIP



Seamless switching

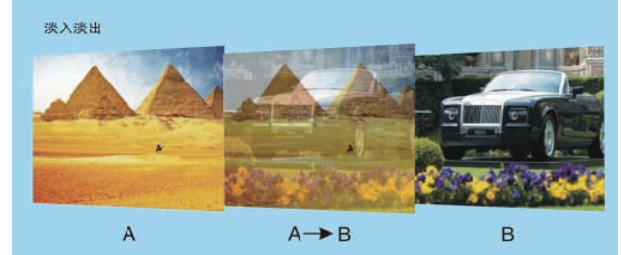

Free customized output among 2.5 million.
Widest being 3840, Highest being 1920.



Display:

Resolution:

Orientation:

SPECIFICATIONS

Inputs	Standard 1 × DVI 1 × HDMI 1 × VGA 2 × CVBS
Outputs	Standard 2 × DVI, 1 × VGA
Operation	Front panel+RS232 Open Protocol Control
Input format	DVI VESA: 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200 2048x1152
	HDMI SMPTE: 480i 576i 720p 1080i 1080p VESA: 800x600 1024x768 1280x720 1280x800 1280x960 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152
	VGA 800x600 1024x768 1280x1024 1600x1200 1920x1080 1920x1200
	CVBS SMPTE: 480i 576i
Output format	SMPTE 720p 1080p
	VESA 1024x768 1280x720 1280x1024 1400x1050 1600x1200 1920x1080 1920x1200 2048x1152 2560x816 1024x1280 1152x1152 1280x1280 1536x1536 2560x1024 2560x1600 3840x540
Standards Support	VGA VGA-UXGA
	HDMI 1.3
	DVI
Input Power	AC 100~264V (Typical110/220) 50/60Hz
Max Power	20W
TEMP	-25°C~55°C (Typical 25°C)
HUM	20%~90%
Weight	3.0kg (Device)
	4.0kg (Packed)
Dimensions	480mm x 265mm x 44mm (Device)
	540mm x 365mm x 135mm (Packed)

Order Codes

Product Code	Model
P180-VA1-000-01	1U Scaler & Switcher with small button

Web : www.sprolink.com

TEL : +86 188 5925 7625

E-mail : sales@sprolink.com

WeChat : Felix_SPROLINK