

Taylorleds

VE

Pro Series

Versatile Live Event Indoor/Outdoor LED.
Elevated Graphics Capabilities.

VE PRO SERIES INDOOR 1.9mm, 2.6mm, 2.9mm, 3.9mm; OUTDOOR 2.9mm, 3.9mm

2024 VE PRO SERIES MODULAR LED MADE FOR ATS-PRO BY TAYLORLEDS





Masters in the Art of LED

Welcome to ATS-Pro, the exclusive U.S. distributor for Taylorleds. With nearly two decades of experience in the AV industry, I founded ATS-Pro to bring unmatched expertise and innovation to our clients.

Taylorleds, our esteemed partner, is an innovative joint venture with Absen, excelling in design, R&D, and quality control. Absen, a leading Chinese manufacturer, handles production, ensuring top-notch quality. Together, we present the most advanced LED systems, meticulously crafted for superior performance.


At ATS-Pro, our dedicated account managers, top-tier technical support, and industry thought leaders work tirelessly to help you master the art of LED technology. I invite you to explore our brochures and experience innovation at its finest.

Warm regards,

Chris Pelzan

Versatile Live Event Indoor/Outdoor LED


VE Pro Series Indoor / Outdoor LED video walls are engineered to fulfill the requirements of event applications, entertainment facilities, large venues, and other substantial fixed installations. They offer full front or rear service access to electronics for deployment versatility, and cabinets with a quick-lock system to support easy installation. Event LED walls enhance the visual experience, providing vibrant, high-resolution displays that captivate audiences and ensure every detail is seen, no matter the size of the venue.

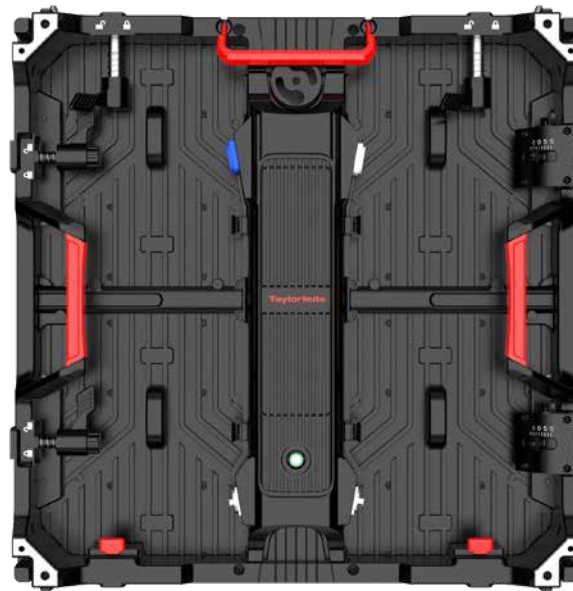

Elevated Panel Design with Pro Features

Anti Collision Design

The anti-collision design ensures maximum protection during installation and transportation, minimizing the risk of damage to LED panels and preserving their integrity. By preventing collisions, it extends the equipment's lifespan, reduces maintenance costs, and safeguards your investment.

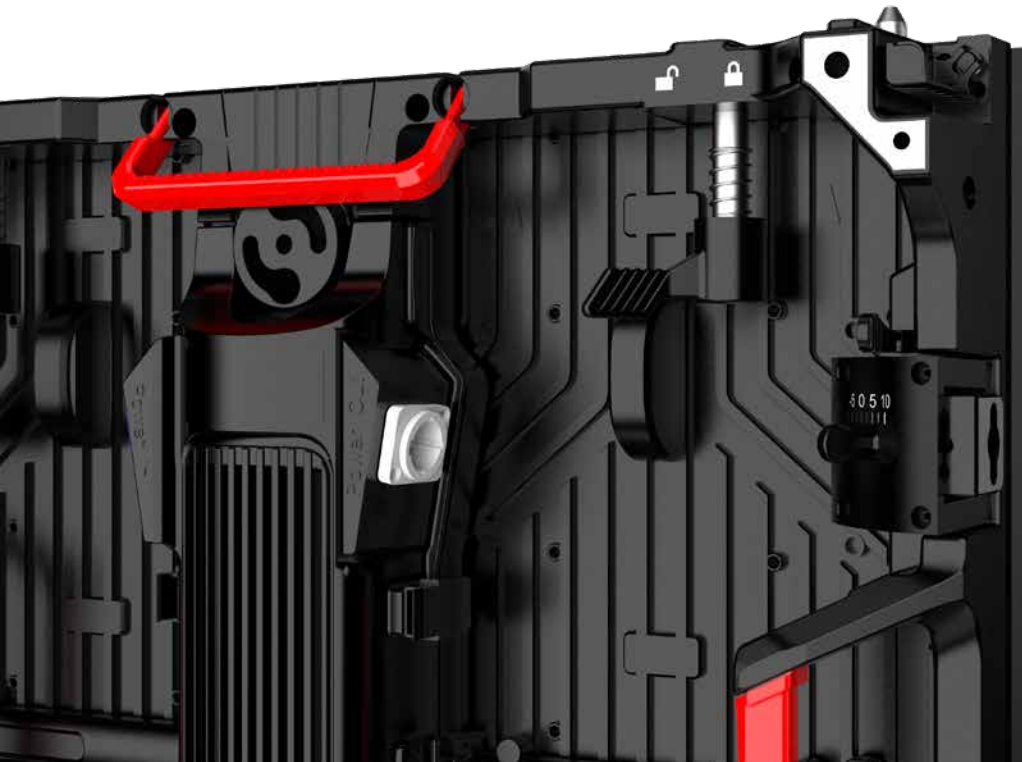

Curve Lock

The curve lock system for concave or convex wave screen designs, adjustable from -5° to 10° , is a crucial feature that enhances the versatility and visual impact of LED installations. This system allows for the creation of seamless, curved displays that can conform to various architectural elements, providing an immersive viewing experience.

Cam Lock Connectors

Cam lock connectors for LED panels enable quick and secure connections, making assembly and disassembly fast and tool-free. They ensure stable alignment, prevent gaps, and withstand repeated use, facilitating easy maintenance and adjustments while ensuring a durable and reliable display.




Slender & Portable Just over 3" thick panel (80 mm / 3.15").

Front & Rear Serviceable



The VE Pro LED display is designed for ultimate convenience and efficiency, featuring both front and rear serviceability. This innovative design ensures that the power units and LED modules can be easily removed and replaced from either side of the display, significantly reducing maintenance time and effort.



**ATS
PRO®**

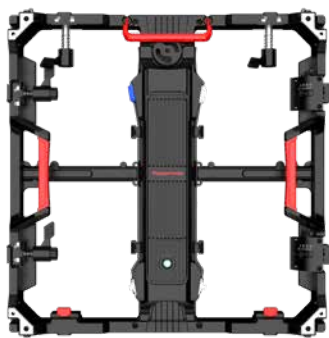


Two panel sizes 500mm x 500mm panels and 500mm x 1000mm panels available.

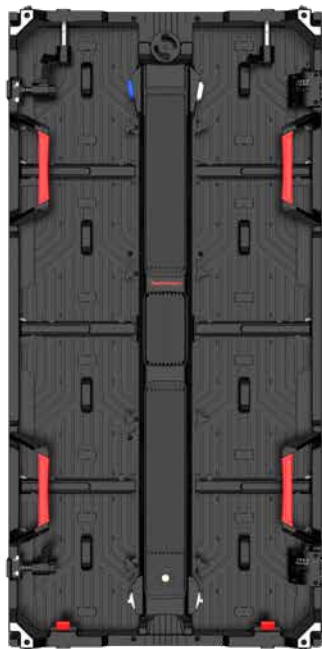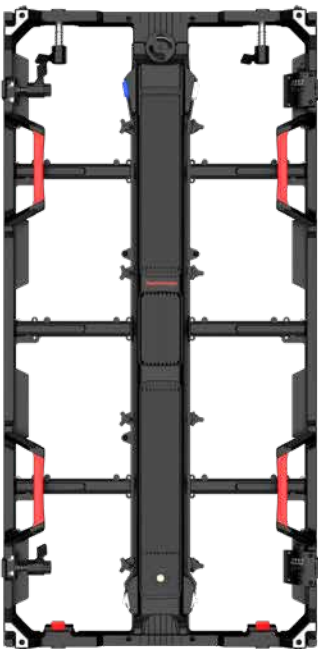



2.9 & 3.9mm Outdoor IP65/54 Rated Panels

The IP65 rating indicates that the panels are completely dust-tight and protected against water jets from any direction, making them highly durable in various weather conditions. The IP54 rating ensures protection against dust ingress and water splashes, providing added resilience. These ratings are essential for maintaining optimal functionality and longevity of the LED panels, ensuring they can withstand harsh outdoor environments while delivering vibrant, high-resolution visuals.

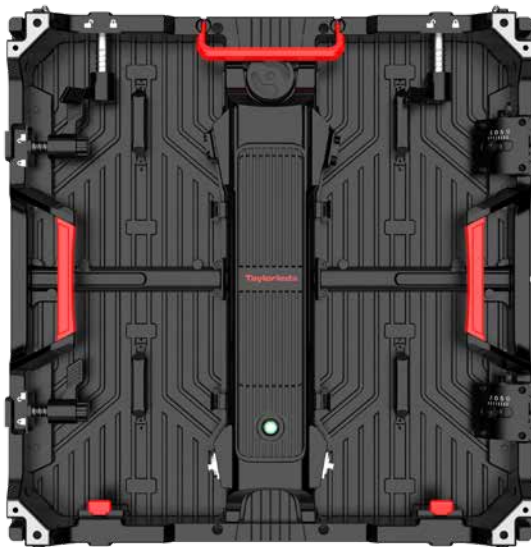


**ATS
PRO**

Optional 4-sided 45 degree angle panels

Creative Applications

The 500mm x 500mm panel is versatile, allowing for the construction of five or four-sided cubes, rectangles, corners, and various other geometric shapes, enabling a wide range of innovative display designs.

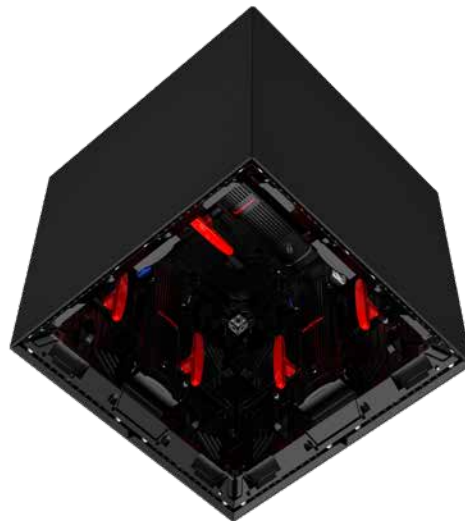


Road Case Options

Flight Case: 500mm x 1000mm

Superior 5 in 1 flight case for 500 x 1000mm cabinets.

Flight Case: 500mm x 500mm

Superior 8 in 1 flight case for 500 x 500mm cabinets.

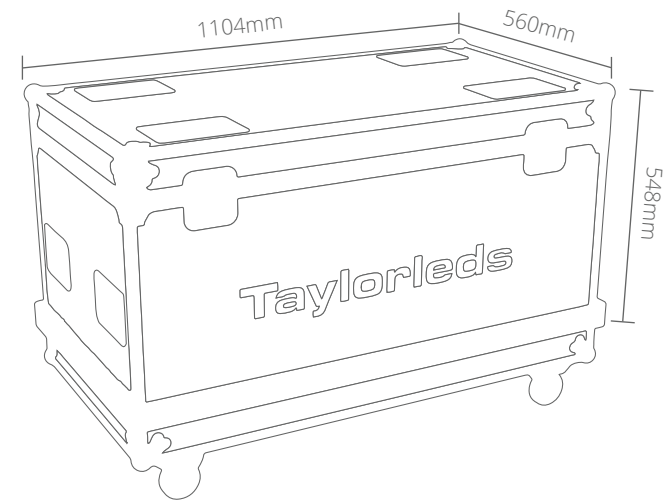

Advanced Tour Stacking

Stacking Option 1

Designed by industry veterans, the universal stacking system for LED panels is both easy to use and highly reliable, ensuring quick setup and teardown for concert touring while maintaining stability and performance throughout the event.



Standard Stacking

Stacking Option 2

Designed by industry pros, the affordable stacking system for LED panels offers user-friendly features and exceptional reliability, enabling swift setup and teardown for events while delivering consistent stability and performance.



**ATS
PRO**

Hanging Options

Rigging System

Designed for ease and efficiency, the super lightweight hanging bars come with integrated curve plates, making them simple to use while providing enhanced versatility for a variety of event setups. These features ensure a quick and reliable installation process, allowing for seamless integration into any LED panel configuration.





Elevated Graphics Performance

VE Pro turbo-charged with the A10sPro Card and MX COEX Series VMP Platform

By making the the VE Pro come standard with the NovaStar A10s Pro Receiving Card, we upgraded the IC's to take full advantage of the most powerful graphics engine and processing available on the market today. With the exceptional, elegant design of the VE Pro Series and the powerful new COEX MX Series Processors, the VE Pro elevates the LED experience by providing state-of-the-art color, operational control and advanced camera correction features.



Shutter Fit

Supports synchronization of LED display refresh rate and camera shutter parameters. LED automatically adapts to camera exposure time and frequency, alleviating scan lines.



Frame Multiplexing

Allows users to re-frame multiple video feeds in the same time field. It is possible to output multiple effects simultaneously within a single shooting scene, improving work efficiency.




Color Replacement

Supports unrestricted color replacement, with minimal impact on other colors.



HFR

Supports high frame rates up to 120Hz, 144Hz, or even 240Hz. This allows smooth representation of video featuring high-speed moving objects.

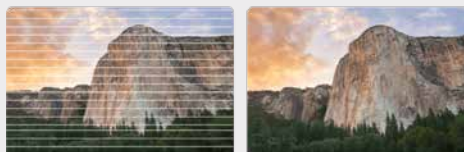

Phase Offset

Adjusting the output phase offset value allows the LED display and camera to perfectly match. Prevents black field and image tearing from being captured when shooting the LED display.



14CH Color Correction

Precise adjustment of hue, saturation, and brightness of primary, secondary and tertiary colors, with basic adjustment of black and white, ensuring perfect colors.





Color Curve + 3D LUT

Curve adjustment and importing of 3D LUT files let you manage color in creative and artistic ways, just like a Hollywood colorist.




Contrast + Black Level

Allows independent adjustment of highlights and shadows by contrast and black level, avoiding overexposure but delivering rich dark content.



Dual Image Booster

Improves the performance of grayscale, color and contrast ratio, creating an immersive view to fulfill the requirements necessary for xR applications.

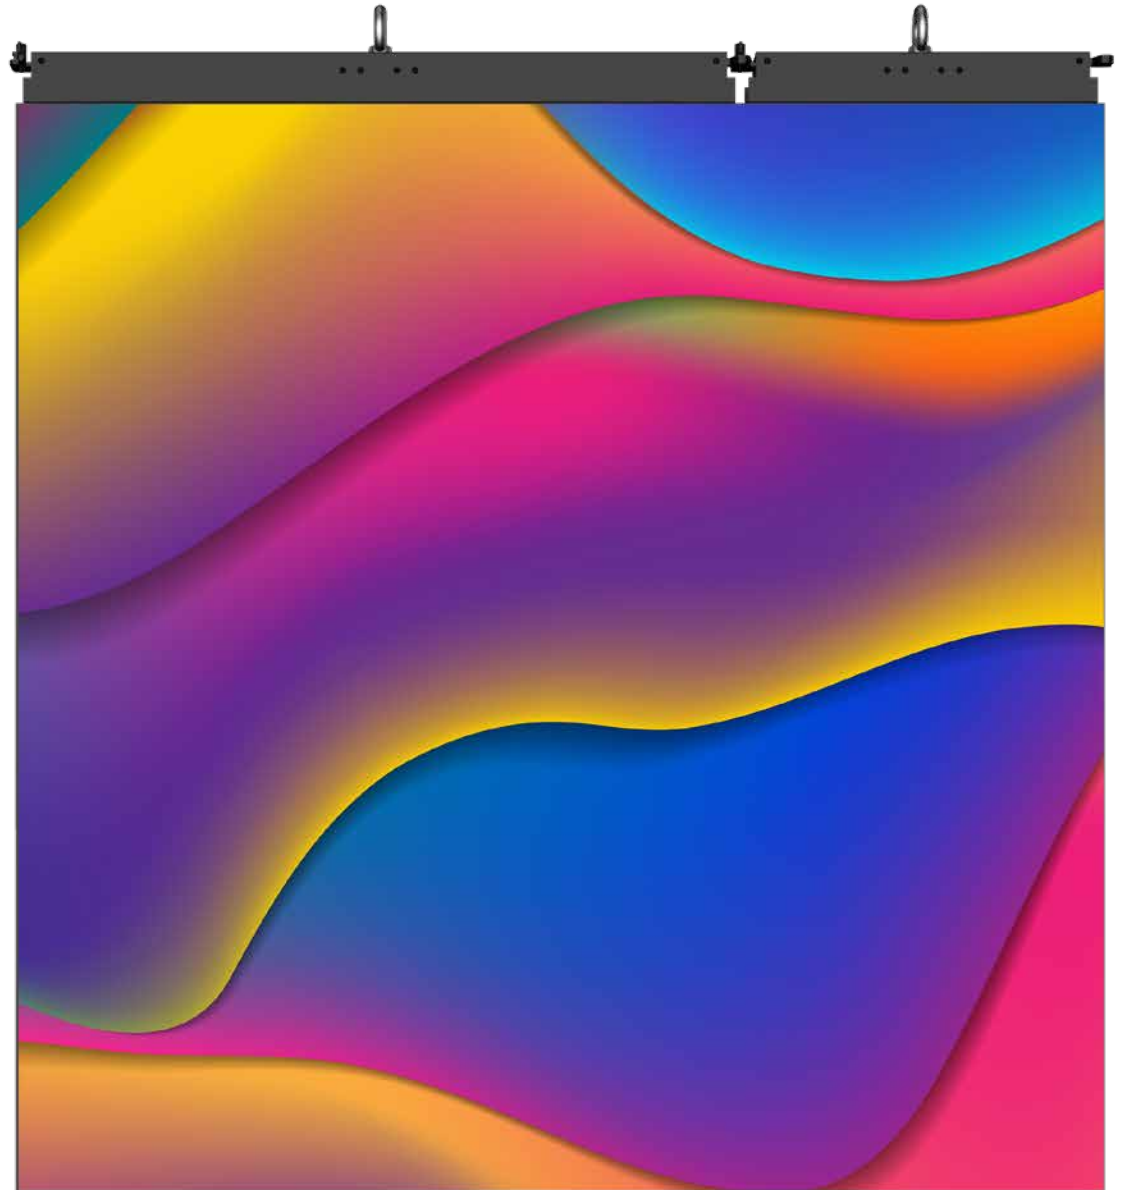



Exceptional Video Processing

NovaStar, a global leading LED display solution provider, designs and develops LED display control solutions for a variety of market applications. ATS-Pro is the largest NovaStar distributor in North America with technical support second to none. Their processors work with the brand-new VMP Software to provide a better operation and control experience.

MX40 Pro

The MX40 Pro is a flagship all-in-one LED display controller with 20 Ethernet ports in the new control system COEX series. This controller integrates video processing and video control into one box and offers rich video input connectors (HDMI 2.0, DP 1.2 and 12G-SDI), 20x Ethernet output ports and 4x 10G optical ports.

MX30 SF **Exclusive to ATS-Pro**

The SF adds the Shutter Fit features of the MX40 Pro. It is an all-in-one LED display controller in the new control system COEX series. This controller integrates video processing and video control into one box and offers rich video input connectors (HDMI 2.0, HDMI 1.4, DP 1.1 and 3G-SDI), 10x Ethernet output ports and 2x 10G optical ports.

MX20

The MX20 is an all-in-one LED display controller in the brand-new control system COEX series. This controller integrates video processing and video control into one box and offers 2x HDMI 1.3, 1x 3G-SDI input connectors, 6x Ethernet output ports, and 2x 10G optical ports.



Specifications

ATS-PRO VE Pro Series Modular LED panel shown. Additional frame sizes available.

Specifications	INDOOR				OUTDOOR	
	VE Pro 1.9	VE Pro 2.6	VE Pro 2.9	VE Pro 3.9	VE Pro 2.9	VE Pro 3.9
LED Type	Black SMD 3 in 1 1212	Black SMD 3 in 1 1515	Black SMD 3 in 1 2020	Black SMD 3 in 1 1921	SMD 3 in 1 1515	SMD 3 in 1 1921
Graphics Card	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro
Pixel Pitch (mm)	1.9	2.6	2.9	3.9	2.9	3.9
Panel Dimensions (W*H*D)/(mm)	500 x 500 x 80	500 x 500 x 80	500 x 500 x 80	500 x 500 x 80	500 x 500 x 80	500 x 500 x 80
Panel Weight (kg)	7.5	7.5	7.5	7.5	8	8
Pixel Per Panel (w, h)	256 x 256	192 x 192	168 x 168	128 x 128	168 x 168	128 x 128
Panel Material	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum
Module Dimensions (W*H)/(mm)	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250
Brightness (nit)	900	1000	1000	800	4000	4000
Refresh Rate (Hz)	3840	3840	3840	3840	3840	3840
Grayscale (bit)	14	14	14	14	15	14
Contrast Ratio	5000:1	5500:1	5500:1	4000:1	4000:1	4000:1
Color Temperature (K)	6500	6500	6500	6500	6500	6500
Viewing Angle (H/V) (°)	160/160	160/160	160/160	160/160	140/120	160/150
Driving Type	1/32	1/24	1/28	1/16	1/14	1/16
AC Operating Voltage (V)	100~240	100~240	100~240	100~240	100~240	100~240
Power Consumption (Max./Avg.) (W/m²)	500/167	690/230	498/166	440/147	720/240	588/196
Storage Temperature (°C)	-40~ + 60	-40~ + 60	-40~ + 60	-40~ + 60	-40~ + 60	-40~ + 60
Operating Temperature (°C)	-10~ + 40	-10~ + 40	-10~ + 40	-10~ + 40	-20~ + 50	-20~ + 50
Storage Humidity (RH)	10%~90%	10%~90%	10%~90%	10%~90%	10%~85%	10%~90%
Operating Humidity (RH)	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP65/IP54	IP65/IP54	IP65/IP54
LED Lifetime (H)	100000	100000	100000	100000	100000	100000
Module Maintenance	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear
PSU & Others Maintenance	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear
Panel Installation Type	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking
Max Rigging QTY	20	20	20	20	20	20
Certification	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC

Specifications subject to change. Please contact ATS-Pro for updated specifications.



Specifications

ATS-PRO VE Pro XL Series Modular LED panel shown. Additional frame sizes available.

Specifications	INDOOR			OUTDOOR	
	VE Pro XL 2.6	VE Pro XL 2.9	VE Pro XL 3.9	VE Pro XL 2.9	VE Pro XL 3.9
LED Type	Black SMD 3 in 1 1515	Black SMD 3 in 1 2020	Black SMD 3 in 1 2020	SMD 3 in 1 1515	SMD 3 in 1 1921
Graphics Card	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro	Novastar A10s Pro
Pixel Pitch (mm)	2.6	2.9	3.9	2.9	3.9
Panel Dimensions (W*H*D)(mm)	500 x 1000 x 80	500 x 1000 x 80	500 x 1000 x 80	500 x 1000 x 80	500 x 1000 x 80
Panel Weight (kg)	12.5	12.5	12.5	13.5	13.5
Pixel Per Panel (w, h)	192 x 384	168 x 336	128 x 256	168 x 336	128 x 256
Panel Material	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum	Die Casting Aluminum
Module Dimensions (W*H)/(mm)	250 x 250	250 x 250	250 x 250	250 x 250	250 x 250
Brightness (nit)	1000	1000	800	4000	4000
Refresh Rate (Hz)	3840	3840	3840	3840	3840
Grayscale (bit)	14	14	14	15	14
Contrast Ratio	5500:1	5500:1	4000:1	4000:1	4000:1
Color Temperature (K)	6500	6500	6500	6500	6500
Viewing Angle (H/V) (°)	160/160	160/160	160/160	140/120	160/150
Driving Type	1/24	1/28	1/16	1/14	1/16
AC Operating Voltage (V)	100~240	100~240	100~240	100~240	100~240
Power Consumption (Max./Avg.) (W/m²)	690/230	498/166	440/147	720/240	588/196
Storage Temperature (°C)	-40~ + 60	-40~ + 60	-40~ + 60	-40~ + 60	-40~ + 60
Operating Temperature (°C)	-10~ + 40	-10~ + 40	-10~ + 40	-20~ + 50	-20~ + 50
Storage Humidity (RH)	10%~90%	10%~90%	10%~90%	10%~85%	10%~90%
Operating Humidity (RH)	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP65/IP54	IP65/IP54
LED Lifetime (H)	100000	100000	100000	100000	100000
Module Maintenance	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear
PSU & Others Maintenance	Front or Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear
Panel Installation Type	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking	Hanging / Stacking
Max Rigging QTY	10	10	10	10	10
Certification	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC	CE, RoHS, ETL, FCC

Specifications subject to change. Please contact ATS-Pro for updated specifications.





Masters in the Art of LED

©2024 ATS PRO. ATS PRO is a registered mark of Activate the Space, LLC.
Specifications and design are subject to change without notice. Non-metric weights
and measurements are approximate. Simulated screen images. All brand, product,
service names and logos are trademarks and/or registered trademarks of their
respective manufacturers and companies. See ats-pro.com for detailed information.

www.ats-pro.com | 800-755-3235

